

- **NOW!!! SURFACE MOUNTABLE VERSIONS OF SMI'S POPULAR SM5600 AND SM5800 SERIES PARTS**
- **FULLY TEMPERATURE CALIBRATED AND COMPENSATED**
- **PRESSURE RANGES DOWN TO 0.15 PSI FULL-SCALE**
- **SM5800 SERIES FULLY AMPLIFIED**

DESCRIPTION


Silicon Microstructures, Inc. (SMI) introduces a surface-mountable version of the SM5600 and SM5800 series. All electrical parameters are identical to the existing product including the fully amplified SM5800 series and the very low pressure ranges (0.15 PSI full-scale). Now the package is supplied in a surface-mountable configuration, eliminating the need for thru-hole printed circuit boards.

FEATURES




- Full selection of pressure ranges (from 0-0.15 PSI FS to 0-100 PSI FS) as found in the original SM5600 and SM5800 series
- Same specification as the existing SM5600 and 5800 series
- Easy to use surface mountable package (DIP)
- High performance, stable packaged silicon chip
- Absolute, Gage and Differential pressure configurations

APPLICATIONS

- Medical equipment
- Respiration
- HVAC
- Level detection
- Flow measurement
- Industrial control

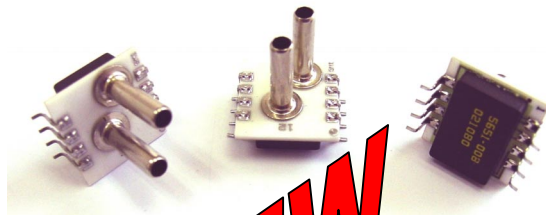

NEW

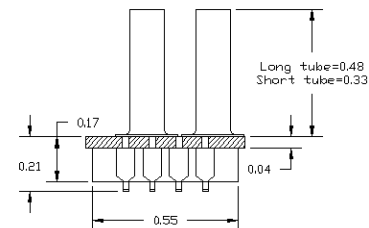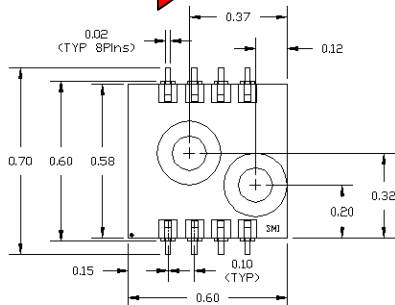

All dimensions in inches.

Notice:

Silicon Microstructures, Inc. reserves the right to make changes to the product contained in this publication. Silicon Microstructures, Inc. assumes no responsibility for the use of any circuits described herein, conveys no license under any patent or other right, and makes no representation that the circuits are free of patent infringement. While the information in this publication has been checked, no responsibility, however, is assumed for inaccuracies.

Silicon Microstructures, Inc. does not recommend the use of any of its products in life support applications where the failure or malfunction of the product can reasonably be expected to cause failure of a life-support system or to significantly affect its safety or effectiveness. Products are not authorized for use in such applications.

Example of How to Order:

Excitation
1: Constant Current
2: Constant Voltage

Pin Configuration
3: Pins opposite direction of tube
5: Surface mountable Pins opposite side of tubes

Tube Length
L: Long (0.480" +/- 0.005")
N: No Tube
S: Short Tube (0.330" +/- 0.005")

Pressure Type
A: Absolute (1 Tube) (SM5612 Only)
D: Differential (2 Tubes)
G: Gage (1 Tube)

Other configurations available on large orders. Consult SMI for details.

